


**Round sling assembly  
single legged  
model RSG**

EN 1492-2 with high tensile forgings EN 1677.

**Technical data model RSG single legged**

Model	Capacity WLL straight pull kg
RSG-01000-1-SIKA	1000
RSG-02000-1-SIKA	2000
RSG-03000-1-SIKA	3000
RSG-05000-1-SIKA	5000
RSG-08000-1-SIKA	8000

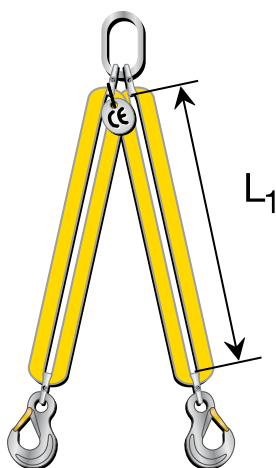

**Round sling assembly  
double legged  
model RSG**

EN 1492-2 with high tensile forgings EN 1677.

**Technical data model RSG double legged**

Model	Capacity WLL, straight pull angle $\beta$ 0°-45° kg	Capacity WLL, straight pull angle $\beta$ 45°-60° kg
RSG-01000-2-SIKA	1400	1000
RSG-02000-2-SIKA	2800	2000
RSG-03000-2-SIKA	4200	3000
RSG-05000-2-SIKA	7000	5000
RSG-08000-2-SIKA	11200	8000