


Round sling assembly
three legged
model RSG

EN 1492-2 with high tensile forgings EN 1677.

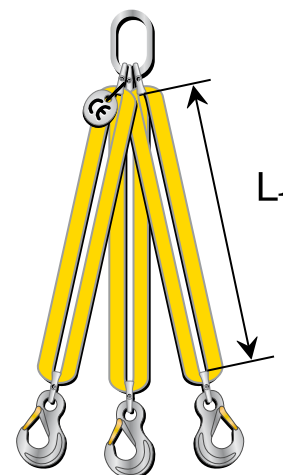


Technical data model RSG three legged

Model	Capacity WLL, straight pull angle β 0°-45° kg	Capacity WLL, straight pull angle β 45°-60° kg
RSG-01000-3-SIKA	2100	1500
RSG-02000-3-SIKA	4200	3000
RSG-03000-3-SIKA	6300	4500
RSG-05000-3-SIKA	10500	7500
RSG-08000-3-SIKA	16800	12000

Round sling assembly
four legged
model RSG

EN 1492-2 with high tensile forgings EN 1677.

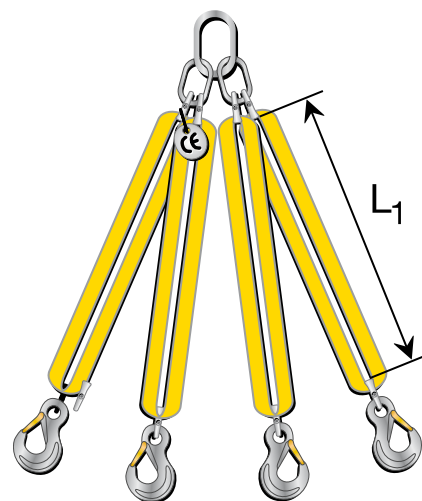

Technical data model RSG four legged

Model	Capacity WLL, straight pull angle β 0°-45° kg	Capacity WLL, straight pull angle β 45°-60° kg
RSG-01000-4-SIKA	2100	1500
RSG-02000-4-SIKA	4200	3000
RSG-03000-4-SIKA	6300	4500
RSG-05000-4-SIKA	10500	7500
RSG-08000-4-SIKA	16800	12000